


TOOLS NEEDED: Phillips Head Screwdriver
7/16" or Adjustable Wrench

PARTS INCLUDED: 2 Side Bridge Assemblies (A)
1 Center Bridge Assembly (B)
4 Center Posts (C)
4 Outside Posts (D)
2 Center Railing Assemblies (E)
4 Ramp Railing Assemblies (F)


HARDWARE: 12 - 2" Carriage Bolts (X)
8 - 2 1/2" Carriage Bolts (Y)
20 Nuts
20 Washers
12- 1 1/4" Wood Screws

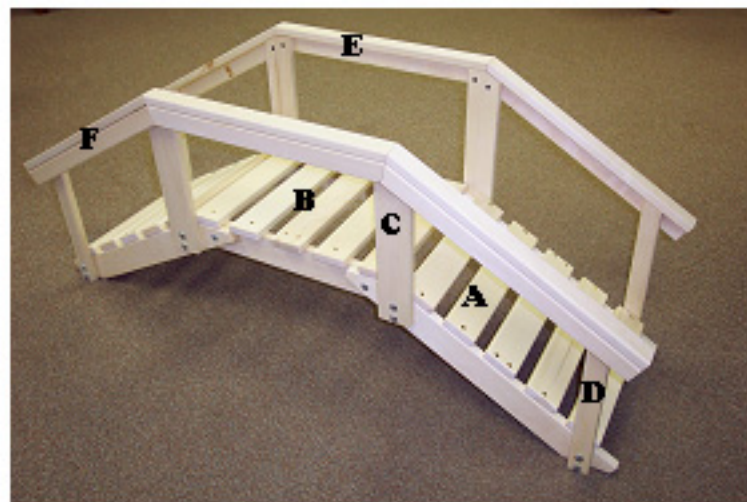

*****THIS BRIDGE IS FOR DECORATION ONLY.*****

✦ ASSEMBLY TIP: For ease of assembly, finger tighten all fasteners first. Tighten securely after all parts are aligned. Do not over tighten. Holes are drilled to easily accept hardware. However, because of finish the holes may be tighter than normal. Lightly tapping the hardware with a hammer will help with the assembly. Using some soap on the screws will make the job a little easier.

1. Attach the middle assembly to one of the side assemblies. The middle assembly will have six pre-drilled bolt holes through each side. On the side assembly, the end with 3 holes gets attached to the middle section. Attach using (2) 2" Carriage Bolts (X), washers and nuts – one on each side. The bolts should be placed through the predrilled holes closest to the middle of the center assembly.

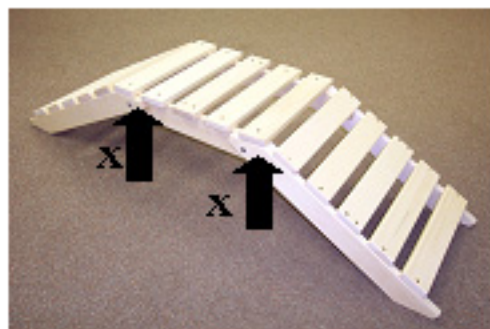

2. Attach the other side assembly by repeating step 1.

3. Attach one of the center posts using (2) 2 1/2" Carriage bolts (Y), washers and nuts through the post, side assembly and middle assembly. The flat section of the top of the post should be towards the middle. Attach the other 3 center posts in the same way.



4. Attach an outside post using (2) 2" Carriage bolts (X). The point of the post should be towards the center of the bridge. Attach the other 3 posts in the same way.